




SIDERURGICA LATINA MARTIN

PC STRAND (7 WIRES) TECHNICAL DATASHEET

Diameter Range (mm) :	6,85 ÷ 18,00
Standards:	prEN 10138-3- ASTM A-416; BS5896, NBN I 10-003; NEN 3868; BS 4258; UNI 7676; UNE36094
Steel Grade Range (Mpa):	1570 – 1670 – 1770 – 1860 – 1960 – 2060 – 2160

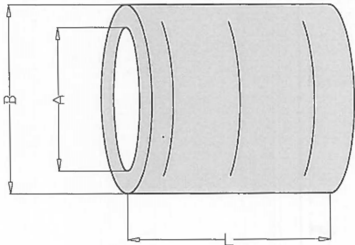

Coil Dimensions:	Ø Inside	(mm)	(A):	800 – 900
	Ø Outside	(mm)	(B):	1550 max
	Height	(mm)	(L):	760 mm
	Weight Range	(kg):		1.000 ÷ 4.500

Packaging: Reelless coil , strapped with 8 radial and 1 circumferential steel straps, tagged and securely fastened onto two wooden dunnages.

REMARK:

In addition, our production program includes **Indented, Unbonded and Compacted PC strands**